

EN 020028
N 6030028
13 Jan



(11) EP 1 137 201 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
26.09.2001 Bulletin 2001/39

(51) Int Cl.7: H04B 7/26

(21) Application number: 00400767.0

(22) Date of filing: 20.03.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Rudolf, Marian
35700 Rennes (FR)
• Jechoux, Bruno
35700 Rennes (FR)

(71) Applicant: Mitsubishi Electric Information
Technology Centre Europe B.V.
1101 AG Amsterdam Zuidoost (NL)

(74) Representative: Maillet, Alain
SCP Le Guen & Maillet,
5, Place Newquay,
B.P. 70250
35802 Dinard Cedex (FR)

(54) Method for transmitting a word representative of transmission parameters respectively allocated to the mobile stations in communication with a base station

(57) The present invention relates to a method for transmitting a word representative of transmission parameters respectively allocated to the mobile stations in communication with a base station of a mobile telecommunication system,

said system being designed in such a way that each mobile station in communication with said base station transmits data in bursts including a midamble or a sum of midambles forming a general midamble that is affected to said mobile station and in such a way that said or each midamble is used for estimating the channel response between said mobile station and said base station,
all said available midambles being derived from an unique basic midamble code by retaining only the elements of said basic midamble code which belong to respective predefined windows shifted one relative to another,
said estimations being performed by correlating the received signal with a sequence based on said basic midamble code and channel estimation output being in temporal positions in one-to-one relationship with said available midambles,
wherein it includes the step of :

including, when data are transmitted from a base station to a mobile station,

in each transmission burst a general midamble resulting from the sum of selected midambles among all the available midambles, said selection being done by said base station in relation with a word so that a selected midamble corresponds to a binary element of said word equal to a first value and a non-selected midamble corresponds to a binary element of said word equal to second value,
considering, at each mobile station side, after having correlated the signal received by said mobile station with a sequence based on the basic midamble code used during the formation of all said midambles, a word the elements of which are in one-to-one relationship with the temporal positions of the estimations respectively corresponding to said available midambles, an element of said word being equal to said first value when the corresponding position includes an estimation of the channel between the base station and the mobile station and being equal to said second value when the corresponding position doesn't, said word

EP 1 137 201 A1

equal to the word to be transmitted enabling said mobile station to have a knowledge of said transmission parameters.

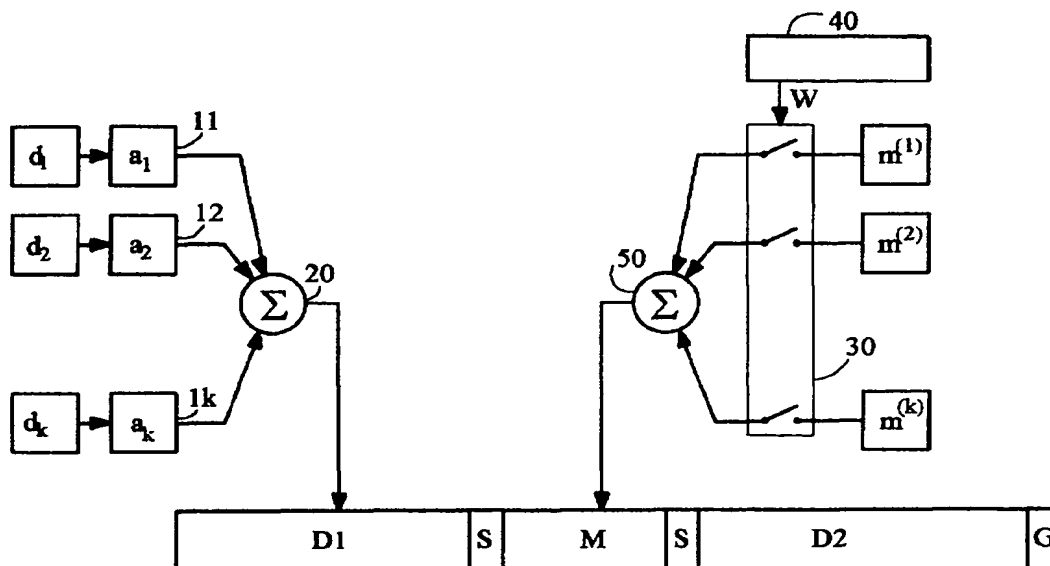


Fig. 5

Description

[0001] The present invention relates to a method for transmitting a word representative of transmission parameters respectively allocated to the mobile stations in communication with a base station of a mobile telecommunication system.

[0002] The present invention is concerned with mobile telecommunication systems comprising a number of base stations which can communicate with mobile stations. Fig. 1 shows a base station BTS in communication with three mobile stations MS1, MS2 and MS3. The communication from a mobile station MS_i to the base station BTS is done by means of an up-link UL and the communication from the base station BTS to a mobile station MS_i is done by means of a down-link DL.

[0003] The present invention is also concerned with telecommunication systems wherein different user signals are separated both in time domain and in code domain. An example of such system is the so called UMTS TDD system or W-CDMA TDD system in which the time domain is represented by the TDD-system component and the code domain by CDMA-system component.

[0004] More particularly, in time-domain, transmission is for example organised based on radio frames constituted of a number N (for example N = 15) of timeslots. The same frequency is used for both the up-link (Mobile Station to Base Station) and the down-link (Base Station to Mobile Station). Furthermore, a time-separation is used to differentiate the down-link and the up-link such that a subset of the N available timeslots per frame is exclusively allocated for down-link transmission and the remaining ones for up-link transmission. In a frame, at least one timeslot is always allocated for each down-link and up-link.

[0005] In such a system, different user's signals can be transmitted in separate timeslots, e.g. N different down-link timeslots are allocated to N different down-link user signals. This is the time-domain of the system. Furthermore, several users signals can also be transmitted within one timeslot by using different spreading codes. This is the code-domain mode of the system.

[0006] In such a system, all base stations in an area operate synchronously and generally share the same up-link/down-link timeslot configurations.

[0007] In both up-link and down-link, user's data is transmitted in a timeslot arranged in a burst B comprising, as illustrated in Fig. 2, a first data field D1, a general midamble field M and a second data field D2. A midamble is a complex-valued chip sequence and is used by a receiver (the base station BTS in the up-link or a mobile station in the down-link) for channel estimation which is needed for the retrieval of the user's signals.

[0008] In the up-link, each mobile station MS_i sends a different midamble m⁽ⁱ⁾, as the base station BTS needs an individual channel estimation for each mobile station transmitting in a particular timeslot.

[0009] Note that when a midamble is not explicitly as-

signed to a mobile station, a default fixed-allocation rule between its assigned spreading code and a particular midamble is used.

[0010] In the down-link shown in Fig. 2, generally just one midamble m⁽⁰⁾ is used by the base station BTS for all user's signals within a particular timeslot. The reason is that in the down-link, all users experience just one down-link channel to estimate, e.g. from the base station BTS to itself and ignore those of the other users transmitting in the same timeslot. But in some situation, when more than one channel estimation is needed, more than one midamble can be used by a base station BTS. In this cases, the midamble M results in the summation of all these midambles.

[0011] A guard period G can be provided to ensure proper separation in time of consecutive timeslots. Also, signalling bits S can be provided.

[0012] In the up-link UL, data of a mobile station MS_i is spread to the chip rate by a complex valued spreading code a_i (or the spreading codes) which is (are) affected to this mobile station MS_i by the system.

[0013] In the down-link DL, each data d_i intended for a mobile station MS_i is spread to the chip rate by a corresponding spreading code a_i (in 11 to 1k on Fig. 2), the results of all these spreading operations being summed (in 20) to form the data D1 and D2 contained in the burst

[0014] A problem occurs when an advanced detection algorithm such as Joint Detection is used for the retrieval of the user's signals at the receiver side. With such an

algorithm implemented, data bits from all users transmitting in a timeslot are simultaneously decoded and decided at receiver-side. For optimal performance of the algorithm, the receiver needs to know several parameters, especially spreading codes and channel profiles of all users which are present in a particular timeslot.

[0015] Generally, when such an algorithm is implemented at a base station-side, the base station can have a knowledge of the allocated spreading codes because the radio access network to which it belongs controls their usage.

[0016] But, the situation is quite different, when the considered algorithm is implemented at the mobile station in the down-link. A mobile station doesn't generally know the other spreading codes which are allocated to the other user's signals simultaneously present in the same timeslot. This fact seriously impacts the implementation of the algorithm, such the Joint-Detection, at mobile station-side.

[0017] One first possibility to overcome this problem is to perform a so-called "Blind spreading-code detection" where it is tested for, for instance by despreading and thresh-holding at mobile station-side, if some or all possible spreading codes are used in a particular timeslot.

[0018] A second possibility consists in communicating to each mobile station all spreading codes which are currently used by all user's signals present in one particular timeslot. This solution is practicable only if this

signalling can be done fast and with only marginal delay. This last constraint especially makes an explicit signalling by multiplexing signalling bits together with the data bits contained in the data fields of a burst not easy to implement.

[0019] It is an object of the present invention to provide a method for a mobile station to determine the transmission parameters, for example the spreading codes, that have been allocated to the other user's signals simultaneously present in the same timeslot in such a way that this method do not present the underlying problem.

[0020] It is a further object of the present invention to provide a method which can be performed without any substantial constraint and, hence, which can be done fast and with only marginal delay.

[0021] It is a further object of the present invention to provide such a method that can be carried out in mobile telecommunication system designed in such a way that each mobile station in communication with said base station transmits data in bursts including a midamble or a sum of midambles that are affected to said mobile station and that said or each midamble is used for estimating the channel response between said mobile station and said base station, all said available midambles being derived from an unique basic midamble code by retaining only the elements of said basic midamble code which belong to respective predefined windows shifted one relative to another, said estimations being performed by correlating the received signal with a sequence based on said basic midamble code and channel estimation output being in temporal positions in one-to-one relationship with said available midambles.

[0022] These objects of the present invention are achieved by a method for transmitting a word representative of transmission parameters respectively allocated to the mobile stations in communication with a base station that includes the step of :

including, when data are transmitted from a base station to a mobile station, in each transmission burst a midamble resulting from the sum of selected midambles among all the available midambles, said selection being done by said base station in relation with a word so that a selected midamble corresponds to a binary element of said word equal to a first value and a non-selected midamble corresponds to a binary element of said word equal to second value, considering, at each mobile station side, after having correlated the signal received by said mobile station with a sequence based on the basic midamble code used during the formation of all said midambles, a word the elements of which are in one-to-one relationship with the temporal positions of the estimations respectively corresponding to said available midambles, an element of said word being equal to said first value when the corresponding po-

sition includes an estimation of the channel between the base station and the mobile station and being equal to said second value when the corresponding position doesn't, said word equal to the word to be transmitted enabling said mobile station to have a knowledge of said transmission parameters.

[0023] In accordance with an additional feature of the present invention, data of each mobile station in communication with said base station are spread by at least one spreading code which is allocated to said mobile station, said transmission parameters being the spreading codes which has been allocated to the mobile stations in communication with said base station.

[0024] In accordance with an additional feature of the present invention, to each element of said word to be transmitted respectively correspond predetermined groups of spreading codes. Advantageously, to each element of said word to be transmitted corresponds one particular spreading code. Or, also advantageously, to each element of said word to be transmitted correspond a node of the tree that is used to form the spreading codes.

[0025] In accordance with an additional feature of the present invention, said bursts being transmitted in timeslots, wherein it performs for the bursts of each timeslot independently of the other timeslots.

[0026] These objects and advantages of the present invention become obvious to those of ordinary skill in the art after having read the following detailed description of the preferred embodiments which are illustrated in the following drawings in which :

Fig. 1 illustrates up-link and down-link in a telecommunication system for mobile stations, in which the present invention finds application,
Fig. 2 illustrates the formation of a burst in a base station of a telecommunication system,
Fig. 3 illustrates the formation of the midambles of a telecommunication system
Fig. 4 illustrates an example of the result of a correlation process that is performed at the mobile station sides of a telecommunication system,
Fig. 5 illustrates the formation of a burst in a base station of a telecommunication system provided to perform a method according to the present invention,
Fig. 6 illustrates an example of the result of a correlation process that is performed at the mobile station sides of a telecommunication system provided to perform a method according to the present invention,
Fig. 7 illustrates the formation of the spreading codes in a telecommunication system,
Figs. 8 to 11 illustrates examples of association rules according to the present invention.

[0027] The present invention proposes to use the midambles to form a word which describes some transmission parameters of signals of each mobile station in communication with a base station.

[0028] The formation of the midambles is first reminded in relation with Fig. 4. The midambles are specific of the users who transmit within the same timeslot. They are all derived from a same basic code BMC, said "basic midamble code". The basic midamble code BMC is concatenated with itself in order to form a bloc B and each specific midamble $m^{(i)}$ ($i = 1$ to k for k users) is derived from the basic midamble code BMC by retaining only the elements of the bloc B which belong to a predefined window. The window corresponding to a specific midamble $m^{(1)}$ is shifted of p elements compared to an adjacent window.

[0029] In the up-link, each mobile station MS_i sends a midamble $m^{(i)}$ different from the others, as the base station BTS needs an individual channel estimation for each mobile station transmitting in a particular timeslot.

[0030] When the base station BTS receives a number of bursts transmitted by the mobile stations MS_1 to MS_k containing each a midamble $m^{(i)}$, a correlation with a special sequence based on the basic midamble code BMC is done and gives a channel estimation output for each of the user transmitting bursts in the same timeslot but in time-distinct windows. This is shown in Fig. 5 in the case of two mobile stations MS_1 and MS_2 sending two midambles $m^{(2)}$ and $m^{(8)}$. The two channel estimation outputs are referenced E_1 and E_2 .

[0031] According to the prior art, in the down-link, generally just one midamble $m^{(i)}$ is used by the base station BTS for all user's signals within a particular timeslot. The reason is that in the down-link, all users experience just one down-link channel to estimate, e.g. from the base station BTS to itself and ignore those of the other users transmitting in the same timeslot. But in some situation, when more than one channel estimations is needed, more than one midambles can be used by a base station BTS.

[0032] Fig. 5 shows the formation of a burst B according an embodiment of the present invention in a base station BTS communicating with k mobile stations MS_1 to MS_k . The processing of the spreading code is identical as the one described in the preamble of the present specification. A spreading process is carried out (in 1i) with the data d ; intended for each mobile station i and all thus spread data are summed (in 20) to form the data fields D_1 and D_2 .

[0033] Corresponding to each mobile station i , a midamble $m^{(i)}$ is formed according to the method described above in relation with Fig. 3. A selection unit 30 is provided to select some midambles in relation with a word W . The word W has as many elements w_i ($i = 1$ to k) as the number of available midambles $m^{(i)}$ so that one element w_i of the word W corresponds univocally to one midamble $m^{(i)}$: the first element corresponds to the first midamble, the second element corresponds to the sec-

ond midamble, etc.

[0034] A control unit 40 formed the word W so that it describes some transmission parameters of each of the mobile stations MS_1 to MS_k that are in communication with the base station BTS.

[0035] All the selected midambles are summed in a summation unit 50 in order to form the general midamble M of the burst B .

[0036] At a mobile station side (one of the mobile station that is in communication with the base station BTS), a correlation with a special sequence based on the basic midamble code BMC used for the formation of the midambles is performed, the result of which is shown in Fig. 6. In Fig. 6, each midamble $m^{(i)}$ selected by the control unit 40 of the base station BTS gives an estimation output that is positioned according to the shift of this midamble $m^{(i)}$. In particular, in Fig. 7, the control unit 40 has selected the midamble $m^{(2)}$, $m^{(4)}$ and $m^{(8)}$ and three estimation outputs E_1 , E_2 and E_3 appear respectively in the second position, the fourth position and the eighth position.

[0037] Note that the estimation outputs E_1 , E_2 and E_3 appearing as a result of the correlation process are identical since they concern the sole down-link DL.

[0038] Always at the mobile station side, a word W_r is built up as follows. At a given position, when an estimation output appears, a binary information that is equal to a first value, for example 1, is considered and when it does not, a binary information that is equal to a second value, for example 0, is considered. The word W_r is the concatenation of the binary information corresponding to all the positions. At Fig. 6, the word W_r can be written 01010001.

[0039] As each element W_{ri} of the word W_r corresponds to a midamble $m^{(i)}$ and as each element w_i of the word W corresponds also to the same midamble $m^{(i)}$, it can be understood that the word W_r is equal to the word W . Therefore, the word W_r describes the transmission parameters of each of the mobile stations MS_1 to MS_k that are in communication with the base station BTS and transmit signals in the same timeslot as the word W does. Each user in this way gets informed which transmission parameters, for example spreading codes, (besides those which are used by himself) are currently used in the current timeslot and this information can be taken as input for a detection algorithm, improving its performing and its efficiency.

[0040] The transmission parameters described by the words W and W_r are advantageously, for a mobile station MS_i , representative of an information concerning the spreading code a_i it uses. An association is made between presence/absence of a particular midamble (which gives the word W) and presence/absence of a particular spreading code. This association is called "association rule" in the following.

[0041] The generation of the spreading codes is now reminded in relation with Fig. 7. Each level in a code tree defines a spreading factor indicated by a value Q ($Q =$

1, $Q = 2$, $Q = 4$, etc.). For each value of the spreading factor Q and for an user k , the spreading codes α_Q^k is defined having Q chips and being orthogonal to the other spreading codes of the same level.

[0042] The spreading codes are allocated to the users in a same timeslot by using the following rules. A code can be used in a timeslot if and only if no other code on the path from the specific code to the root of the tree or in the sub-tree below the specific code is used in this timeslot. These rules imply that the number of available codes in a timeslot is generally not fixed, but rather depends on the number of spreading codes and the spreading factors allocated to all users signals in the same timeslot.

[0043] Specifically, in the CDMA-TDD system described above, only spreading factors Q of 16 or 1 are allowed in the down-link. Hence, either only one spreading code, e.g. $\alpha_{Q=1}^{(k=1)}$ is allocated in one timeslot, or up to 16 different spreading codes $\alpha_{Q=16}^{(k)}$, for the users $k = 1, \dots, 16$.

[0044] Association rules are now described. In case of a number of available midambles equal to the number of spreading codes allocated, the association rule is: the absence/presence of a given midamble corresponds to the absence/presence of a given spreading code in the corresponding timeslot.

[0045] In case of a number of available midambles even submultiple of the number of spreading codes, the association rule is: the absence/presence of a given midamble corresponds to the absence/presence of at least one of the spreading codes that have a common node at spreading factor equal to the number of available midambles.

[0046] In all other cases, the absence/presence of a given midamble corresponds to the absence/presence of at least one of the spreading codes which have been grouped together to form a group of spreading code.

[0047] To ensure that channel estimation can still be done by a mobile station even if it does not currently receive any data bits and even if no spreading code is used in the corresponding timeslot, either no midamble or just at least one default midamble(s) shall be sent. In any case a mobile station will not perform any detection algorithm.

[0048] When more than one channels are used in the down-link (for example when two or more antennas are used), the quantity of possible midambles can be split up equally between the channels. For example, when two channels are used, uneven midambles $m^{(1)}$, $m^{(3)}$, $m^{(5)}$, ... are exclusively used by the first channel and even midambles 2, 4, 6, ... by the second channel. In the W-CDMA TDD-system, a mobile station at switch-on always gets informed by the network about the eventual use of more than one channel in the down-link.

[0049] No ambiguity is present in case that there is only one user with spreading code $\alpha_{Q=1}^{(k=1)}$ in the DL timeslot, as the user itself knows that he is the only one.

[0050] Different association rules are now proposed

in the scope of the CDMA-TDD system for different possible cases of type of midambles and number K of possible users with these midambles.

[0051] In the W-CDMA TDD-system, there are two types of midambles: long midambles, also said type 1 midambles, and short midambles, also said type 2 midambles. In general, different cells use different basic midambles codes for deriving user-specific long or short midambles in a timeslot. The length of the available channel estimation window per user is influenced by the number of users, e.g. shifts per timeslot and vice versa. Basically, the following parameters are valid in the W-CDMA TDD system: long midambles allow up to 8 or 16 different users and short midambles allow up to 3 or 6 different users.

[0052] Examples of particular association rules are now given, in the scope of the W-CDMA TDD system.

[0053] The case of midamble type 1 wherein 16 midambles are authorised for deriving a midamble from the basic midamble code is shown in Fig. 8 where it can be seen that each of the 16 possible spreading codes with spreading factor 16 can be indicated by one of the 16 possible midambles. In Fig. 8, each node in the spreading codes tree that is marked with a cross correspond to a midamble.

[0054] If for instance spreading codes $\alpha_{Q=16}^{(k=2)}$, $\alpha_{Q=16}^{(k=5)}$ and $\alpha_{Q=16}^{(k=9)}$ would be used by the users allocated to the timeslot, midambles $m^{(2)}$, $m^{(5)}$ and $m^{(9)}$ would be transmitted for channel estimation in the down-link and indicate in the same time the presence of the above-mentioned spreading codes.

[0055] Note that the association rule displayed in Fig. 8 is only one (the simplest one...) out of all the possible mapping schemes between spreading codes and shifts.

[0056] The case of midamble type 1 wherein 8 midambles are authorised for deriving a midamble from the basic midamble code is shown in Fig. 9 where it can be seen that the 16 possible spreading codes with spreading factor 16 can be indicated pair-wise by 1 of the 8 possible midambles. In this case, the granularity is said to be two. In Fig. 9, each of the 8 nodes in the tree at spreading factor 8 that is marked with a cross corresponds to one of the 8 possible midambles.

[0057] If for instance spreading codes $\alpha_{Q=16}^{(k=2)}$, $\alpha_{Q=16}^{(k=5)}$ and $\alpha_{Q=16}^{(k=9)}$ would be used by the users allocated to the timeslot, midambles $m^{(1)}$, $m^{(3)}$ and $m^{(5)}$ would be transmitted for channel estimation in the down-link and indicate in the same time the presence of the above-mentioned spreading codes. Even with granularity of 2, the above scheme still provides information about the used spreading factors in the timeslot to the detection algorithm.

[0058] The case of midamble type 2 wherein 6 midambles are authorised for deriving a midamble from the basic midamble code, is shown in Fig. 10 where it can be seen that 8 of the 16 possible spreading codes with spreading factor 16 are grouped pair-wise and correspond to 4 midambles $m^{(1)}$, $m^{(2)}$, $m^{(3)}$ and $m^{(4)}$ and

the 8 others are grouped by four and correspond to 2 midambles $m^{(3)}$ and $m^{(6)}$. The granularity would be then equal to 2 and 4.

[0059] If for instance spreading codes $\alpha_{Q=16}^{(k=2)}$, $\alpha_{Q=16}^{(k=5)}$ and $\alpha_{Q=16}^{(k=9)}$ would be used by the users allocated to the timeslot, midambles $m^{(1)}$, $m^{(3)}$ and $m^{(4)}$ would be transmitted for channel estimation in the down-link and indicate in the same time the presence of the above-mentioned spreading codes. The granularity would be then equal to 4.

[0060] Another example for an association rule in this particular case would be to indicate by means of only 4 among the available 6 midambles the 4 nodes corresponding to spreading factors 4.

[0061] Even with granularity of 2 and 4 respectively, the above scheme still provides valuable information about the used spreading factors in the timeslot.

[0062] The case of midamble type 2 and wherein 3 midambles are authorised for deriving a midamble from the basic midamble code is shown in Fig. 11 where it can be seen that 10 spreading codes are grouped in two groups of five codes to which corresponds two midambles $m^{(1)}$ and $m^{(2)}$ and the 6 remaining form a group to which corresponds the third midamble $m^{(3)}$.

[0063] The granularity of this last example is 5 and 6.

[0064] The advantage of this invention is that it will in any case reduce the number of spreading codes amongst which the so called Blind Spreading Code Detection has to be performed. For example for midamble type 1 wherein 8 midambles are possible, the Blind Spreading Code Detection has to be performed on 2 codes only instead of 16.

[0065] Complexity of baseband processing at network and mobile station side is only slightly increased. Especially the capability to process up to K midambles will always be implemented in the W-CDMA TDD-system at the mobile station side and at the base station side.

Claims

1. Method for transmitting a word representative of transmission parameters respectively allocated to the mobile stations in communication with a base station of a mobile telecommunication system,

said system being designed in such a way that each mobile station in communication with said base station transmits data in bursts including a midamble or a sum of midambles forming a general midamble that is affected to said mobile station and in such a way that said or each midamble is used for estimating the channel response between said mobile station and said base station,

all said available midambles being derived from an unique basic midamble code by retaining

only the elements of said basic midamble code which belong to respective predefined windows shifted one relative to another, said estimations being performed by correlating the received signal with a sequence based on said basic midamble code and channel estimation output being in temporal positions in one-to-one relationship with said available midambles, wherein it includes the step of :

including, when data are transmitted from a base station to a mobile station, in each transmission burst a general midamble resulting from the sum of selected midambles among all the available midambles, said selection being done by said base station in relation with a word so that a selected midamble corresponds to a binary element of said word equal to a first value and a non-selected midamble corresponds to a binary element of said word equal to second value, considering, at each mobile station side, after having correlated the signal received by said mobile station with a sequence based on the basic midamble code used during the formation of all said midambles, a word the elements of which are in one-to-one relationship with the temporal positions of the estimations respectively corresponding to said available midambles, an element of said word being equal to said first value when the corresponding position includes an estimation of the channel between the base station and the mobile station and being equal to said second value when the corresponding position doesn't, said word equal to the word to be transmitted enabling said mobile station to have a knowledge of said transmission parameters.

2. Method according to claim 1, wherein data of each mobile station in communication with said base station are spread by at least one spreading code which is allocated to said mobile station, said transmission parameters being the spreading codes which has been allocated to the mobile stations in communication with said base station.
3. Method according to claim 2, wherein to each element of said word to be transmitted respectively correspond predetermined groups of spreading codes.
4. Method according to claim 2, wherein to each element of said word to be transmitted corresponds

one particular spreading code.

5. Method according to claim 2, wherein to each element of said word to be transmitted correspond a node of the tree that is used to form the spreading codes. 5
6. Method according to one of the preceding claims, said bursts being transmitted in timeslots, wherein it performs for the bursts of each timeslot independently of the other timeslots. 10

15

20

25

30



35

40

45

50

55

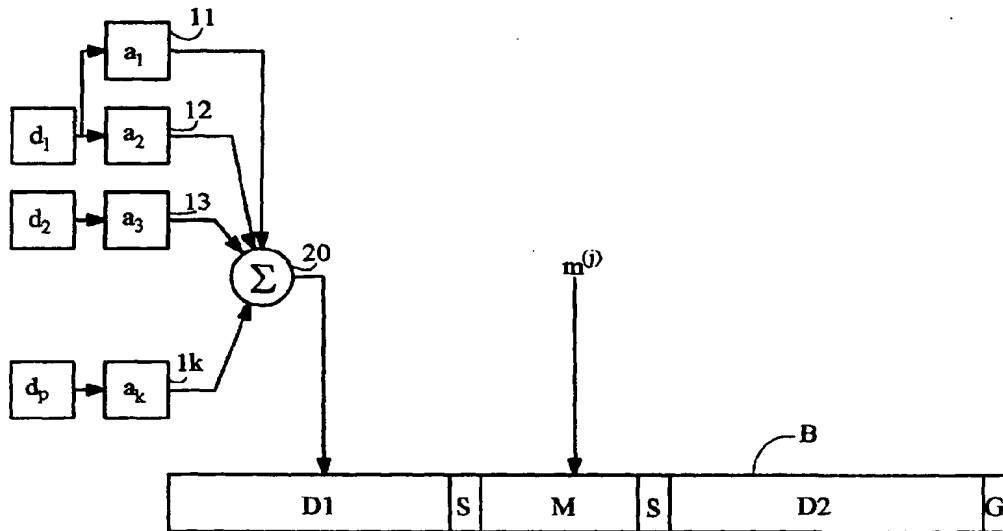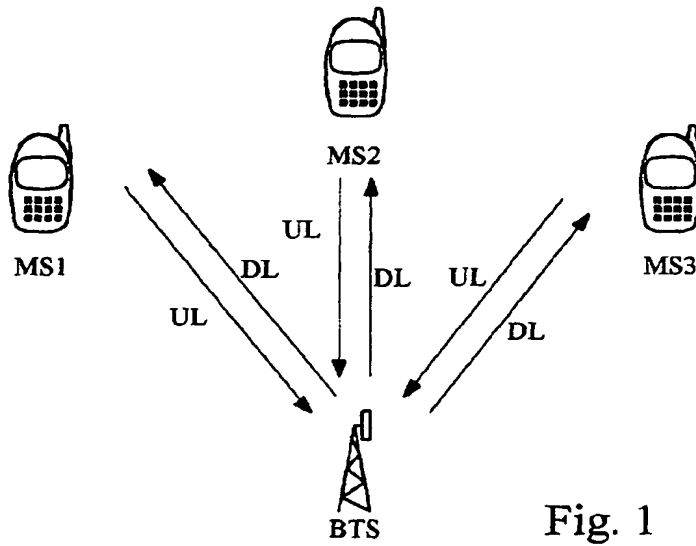

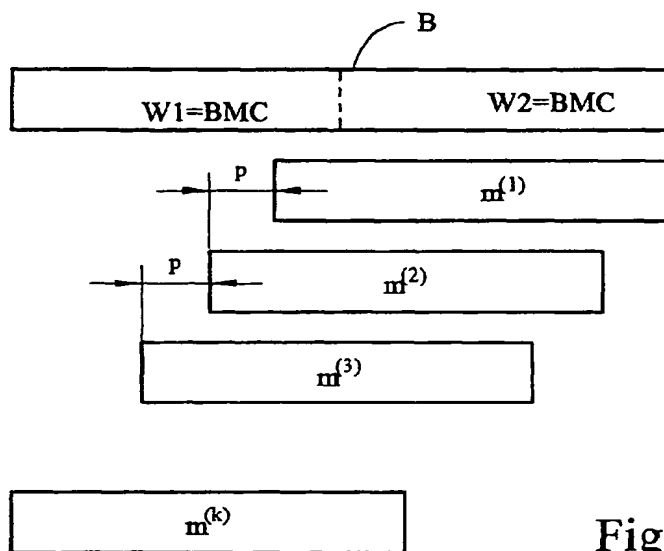


Fig. 3

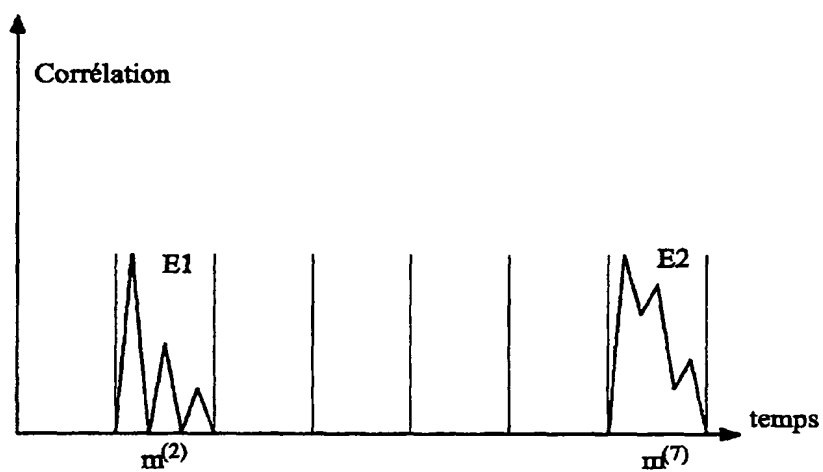


Fig. 4

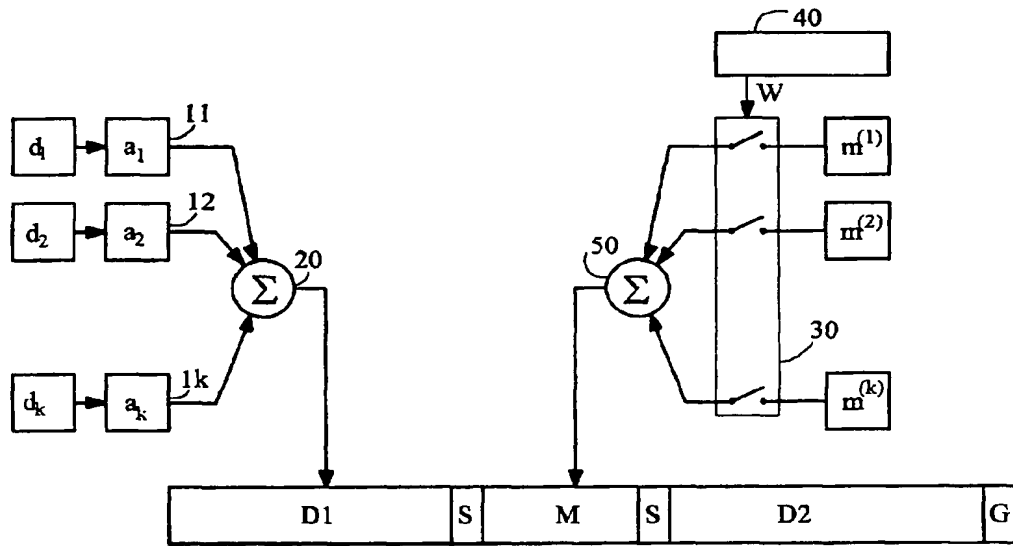


Fig. 5

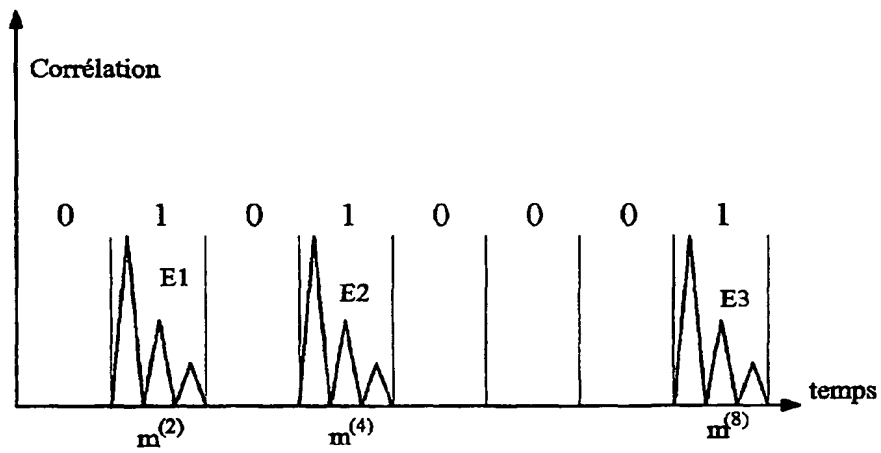


Fig. 6

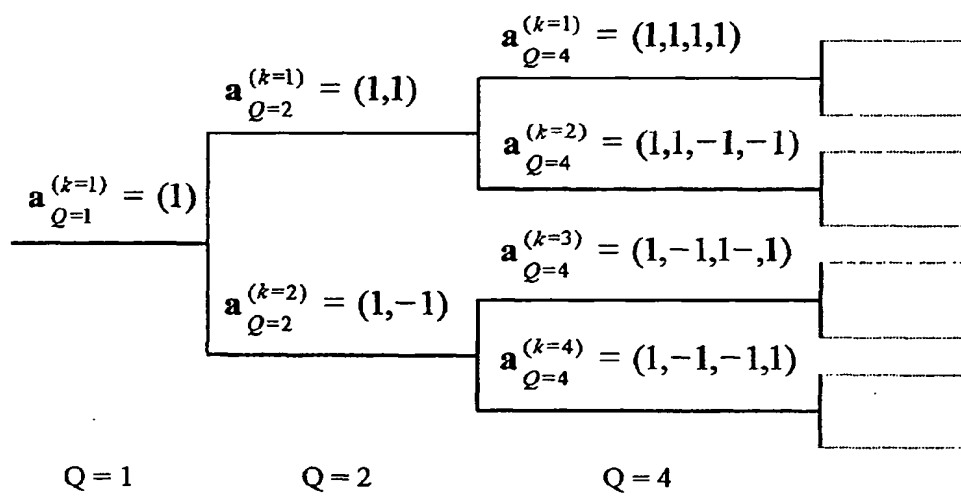


Fig. 7

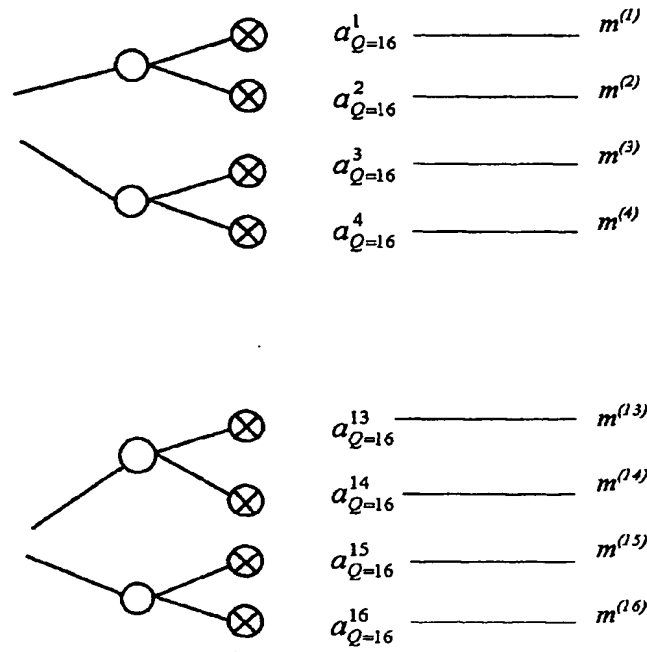


Fig. 8

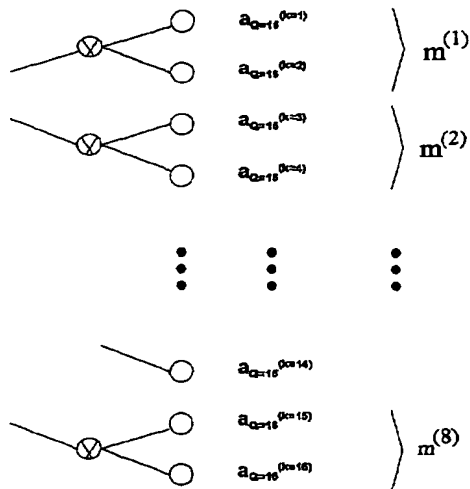


Fig. 9

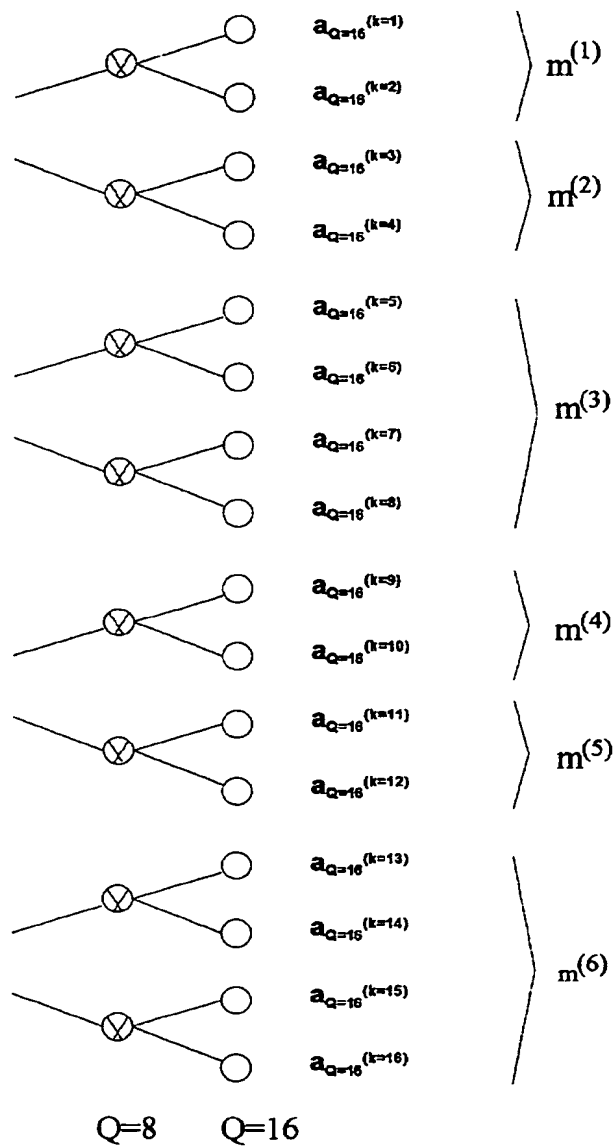


Fig. 10

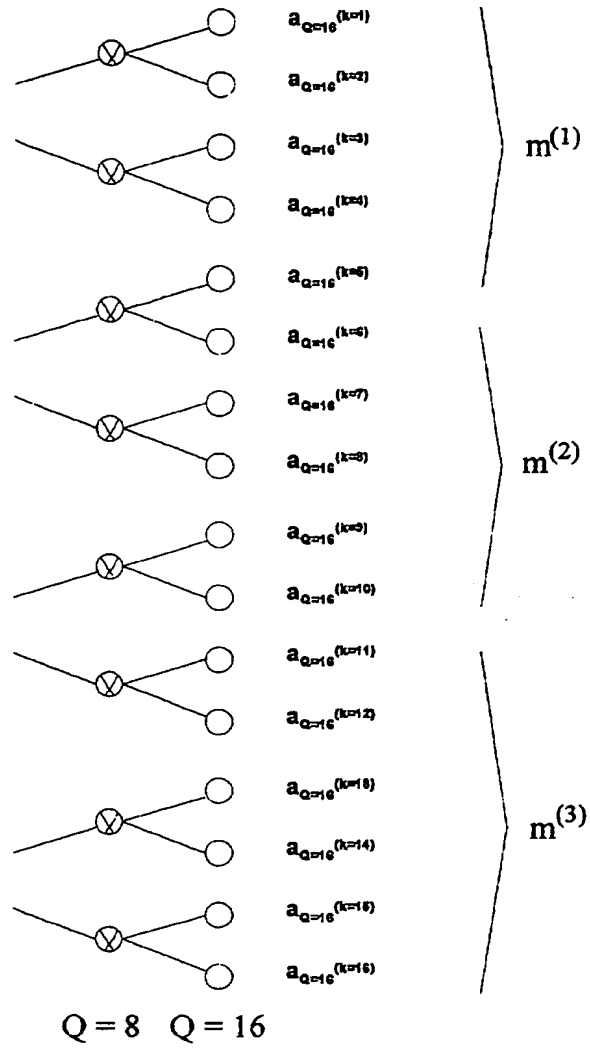


Fig. 11



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 40 0767

DOCUMENTS CONSIDERED TO BE RELEVANT					
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)		
A	US 5 970 060 A (BAIER PAUL-WALTER ET AL) 19 October 1999 (1999-10-19) * column 15, line 24 - line 38; claims 7, 18 *	1-6	H04B7/26		
A	STEINER B ET AL: "OPTIMUM AND SUBOPTIMUM CHANNEL ESTIMATION FOR THE UPLINK OF CDMA MOBILE RADIO SYSTEMS WITH JOINT DETECTION" EUROPEAN TRANSACTIONS ON TELECOMMUNICATIONS AND RELATED TECHNOLOGIES, IT, AEI, MILANO, vol. 5, no. 1, 1994, pages 39-50, XP000445714 ISSN: 1120-3862 * paragraph '0008!; figures 2, 3 *	1-6			
A	DE 197 33 336 A (SIEMENS AG) 18 February 1999 (1999-02-18) * page 4, line 43 - line 55 * * claim 1; figure 4 *	1-6			
A	WO 99 40698 A (MOTOROLA INC) 12 August 1999 (1999-08-12) * page 5, line 14 - line 24 * * figures 1, 4 *	1-6	<table border="1"> <thead> <tr> <th>TECHNICAL FIELDS SEARCHED (Int.Cl.7)</th> </tr> </thead> <tbody> <tr> <td>H04B H04L</td> </tr> </tbody> </table>	TECHNICAL FIELDS SEARCHED (Int.Cl.7)	H04B H04L
TECHNICAL FIELDS SEARCHED (Int.Cl.7)					
H04B H04L					
The present search report has been drawn up for all claims					
Place of search THE HAGUE		Date of completion of the search 3 August 2000	Examiner Sorrentino, A		
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons A : member of the same patent family, corresponding document			

EPO FORM 1503 (3-99) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 40 0767

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-08-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5970060	A	19-10-1999	EP 0767543 A	09-04-1997
DE 19733336	A	18-02-1999	AU 9430398 A	22-02-1999
			WO 9907085 A	11-02-1999
			EP 1000472 A	17-05-2000
NO 9940698	A	12-08-1999	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

This Page Blank (uspto)